




WORLD DGNS

C-NaviGator

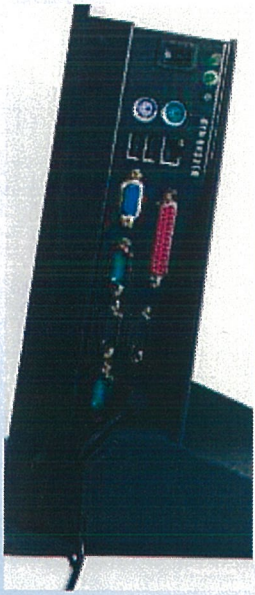

C-NaviGator FEATURES:

- Real-time system and quality information.
- Multiple NMEA inputs and selectable outputs.
- Intuitive and easy to use interface.
- Touch screen display.
- On screen help.
- Four built-in serial and two USB ports.
- Rugged and reliable.



Contract Holder
FSS Contract GS-07F-5671P

FEATURES

- Control and monitor C-Nav GPS receivers
- Monitor NMEA compliant GPS systems
- Four serial and two USB ports
- Save/Load settings
- User selectable units for distance, height, and speed
- User selectable time zones
- Day/Night color settings including Auto Mode
- On-screen help documentation
- Easy Software updates via USB
- Accept and output all NMEA versions (2.1/3.0/3.1)

C-NaviGator QUALITY MONITORING DISPLAYS

- Positioning Information: Large Text Display of Position, HAE, SOG, and COG
- Satellite Information:
 - > Satellite orientation in the form of "sky plot" displaying the current location of the satellites visible to the GPS receiver
 - > Table Display of Satellite Elevation, Azimuth, and L1/L2 Signal Strength
- Error Ellipse - Graphically represents the sum of the horizontal error uncertainty
- Scatter Plot - Displays a history of the positions received from the GPS receiver
- Event Log "Fixes" - List of 'Fixes' saved in memory
- Alarms - List of current alarms
- Side Bar Solution information - This bar is constantly displayed, giving the user the following information at a glance:
 - > Single/Dual Frequency
 - > 2D/3D Height Solution
 - > Corrections in use (RTK, RTG, WCT, SBAS, RTCM, and Autonomous)
 - > Differential Age
 - > Satellites Used in Solution
 - > HDOP, VDOP, and PDOP
 - > FOM

COMPUTER SPECIFICATIONS

- Processor: 1 GHZ VIA C7 Fanless Pentium Class Processor
- Memory: 512MB SDRAM, 2GB CF
- Operating System: Linux - Support for system functions (including SIO, USB, Touch Screen, and Ethernet)
- Display: 10.4" TFT Flat Panel Display - Resistive Touch Screen
~400 cd/m², 1024 (H) x 768 (V) native resolution
- Mounting: 100mm and 75mm VESA, Panel

PHYSICAL/ENVIRONMENTAL

- Size (W x H x D): 13.4" x 10.3" x 3.3" (34.0 x 26.2 x 8.4 cm)
- Weight: 9.8 lbs (4.5 kg)
- Power
 - Input Voltage: 12 VDC
 - Consumption: 250 mA @ 12 VDC
- I/O Connector:
 - > 3 x RS232 + 1 x RS232/422/485 on-board serial ports available for user
 - > 1 x 10/100 Mb/s Ethernet Interface
 - > 4 x USB Interfaces
 - > Audio output "Beep" with buzzer
 - > PS2 Keyboard and Mouse Interface
- Temperature
 - Operating: 0° C to +55° C (+32° F to +131° F) - Convection Cooling - No moving parts
- Housing: Black, high impact, flame resistant, aluminum enclosure

LAFAYETTE (HEADQUARTERS)
730 E. KALISTE SALOOM RD.
LAFAYETTE, LOUISIANA 70508
TEL: (+1) 337.210.0000
FAX: (+1) 337.210.0003

HOUSTON
10615 SHADOW WOOD DR
SUITE 100
HOUSTON, TEXAS 77043
TEL: (+1) 713.468.1536
FAX: (+1) 713.468.1115

MEXICO
CALLE 55 N° 382
COL OBRERA INTER 74 y 76
CUIDAD DEL CARMEN, CAMPECHE
CP 24117, MEXICO
TEL: (+52) 938.381.8973
FAX: (+52) 938.381.8973

BRASIL
Av. DAS AMERICAS, 11889 - 3° ANDAR - BARRA DA TIJUCA
CEP: 22793-082 - RIO DE JANEIRO - RJ
RIO DE JANEIRO, BRASIL
TEL: 55.21.2499.9500
FAX: 55.21.2498.5042

EUROPE
5 HILLSIDE BUSINESS PARK (1ST FLOOR)
KEMPSON WAY
BURY ST EDMUNDS
SUFFOLK, IP32 7EA, UK
TEL: (+44) 1284.703.800
FAX: (+44) 1284.701.004

SINGAPORE
10 CHANGI SOUTH LANE
OSSIA INTERNATIONAL BUILDING #03-01B
SINGAPORE 486162
TEL: (+65) 6295.9738
FAX: (+65) 6296.0098

SOUTH AFRICA
53 PENINSULA ROAD
ZEEKOEVLEI, CAPE TOWN 7941
SOUTH AFRICA
TEL: (+27) 21.705.2741
FAX: (+27) 21.705.2741

ANGOLA
RUA ANTONIO MARQUES
MONTEIRO N° 36/38
LUANDA - ANGOLA
TEL: (+244) 222.330202
FAX: (+244) 222.335464